




# ZTE Awe Camera Replacement

Replace your camera so you can take beautiful photographs and never miss a moment.

Written By: Jennifer DeMeo

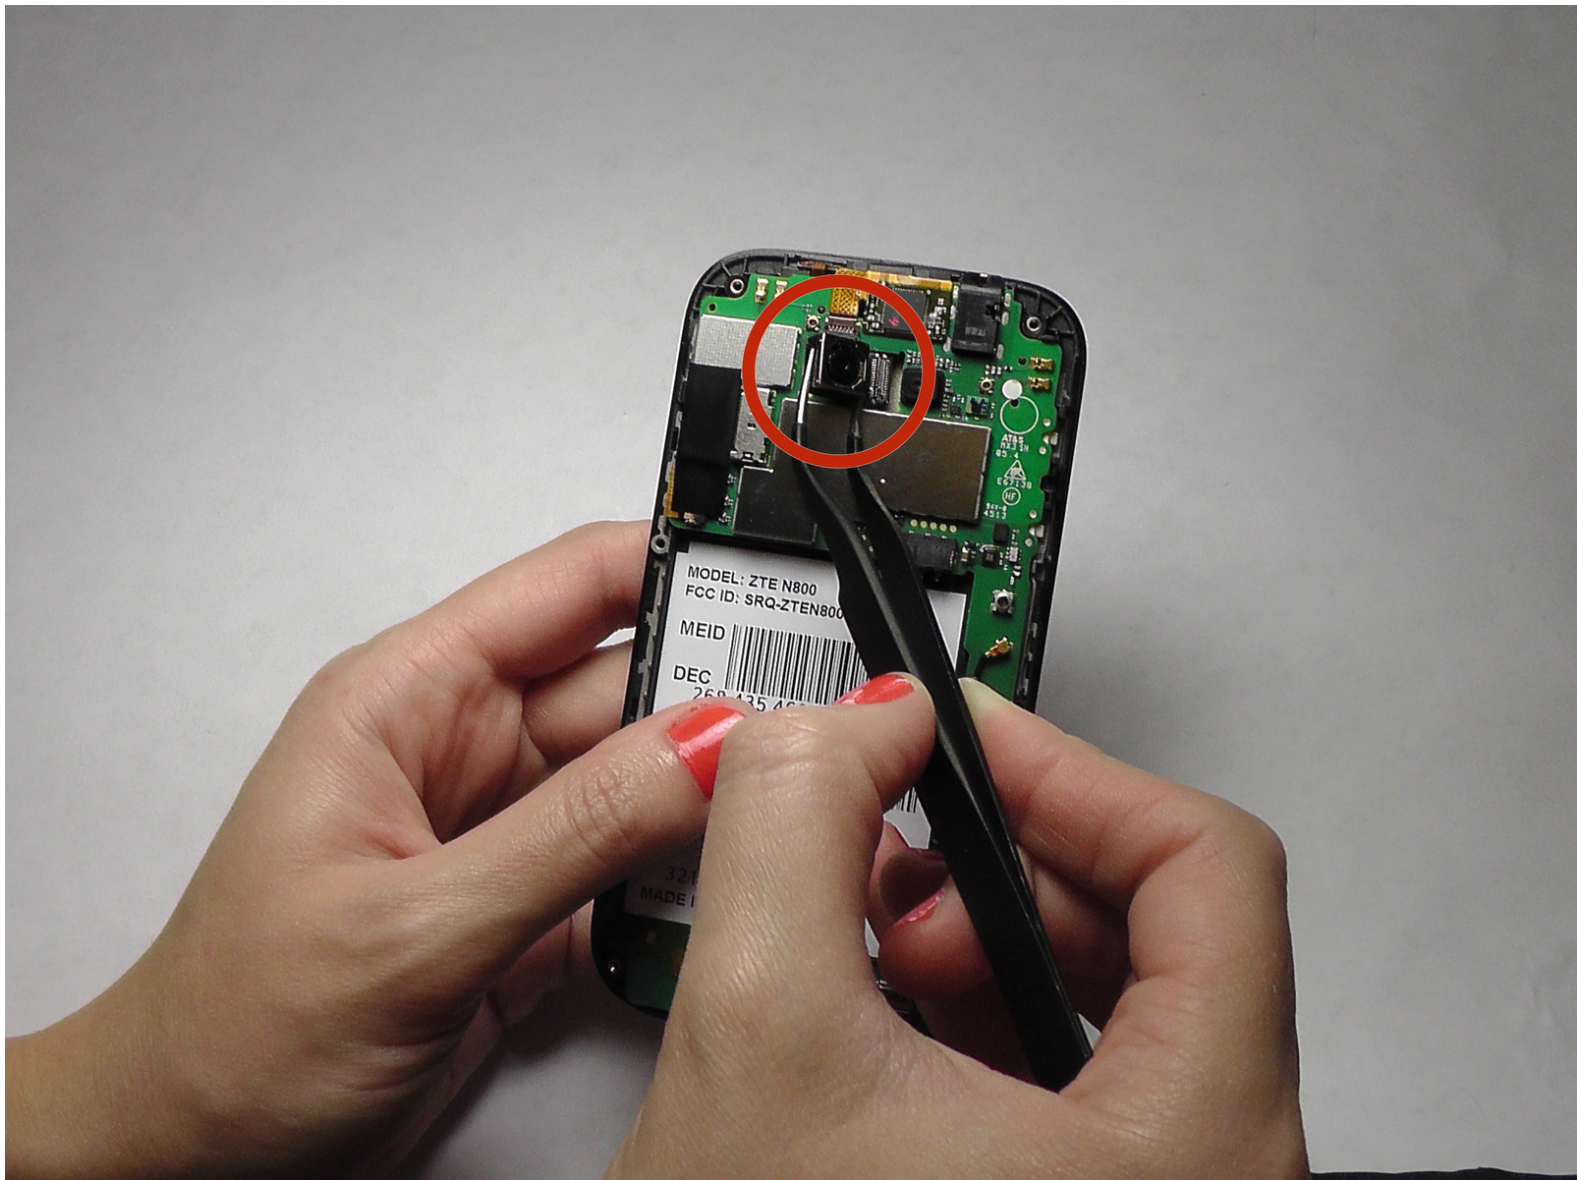

## INTRODUCTION

This guide will show you how to replace the camera in case it breaks or no longer works.

---

### TOOLS:

- [Tweezers](#) (1)
  - [Phillips #00 Screwdriver](#) (1)
  - [iFixit Opening Tools](#) (1)
  - [Essential Electronics Toolkit](#) (1)
-

## Step 1 — Remove the back cover



- Remove the back cover of the phone to expose the phone's mid-frame.

## Step 2 — Remove battery



- Pry the battery up and out of the phone.




### Step 3 — Remove the battery




- Lift the battery out of the phone.

### Step 4 — Unscrew the mid frame

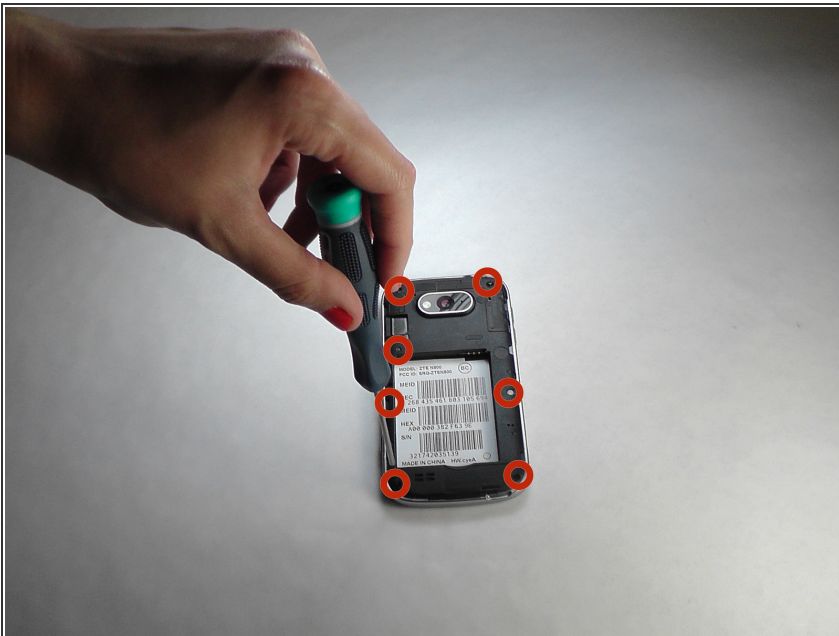


- Use the Phillips Head 00 screw driver to unscrew the seven 0.1mm screws along the perimeter of the phone's mid frame.

## Step 5 — Separate the mid frame and the digitizer

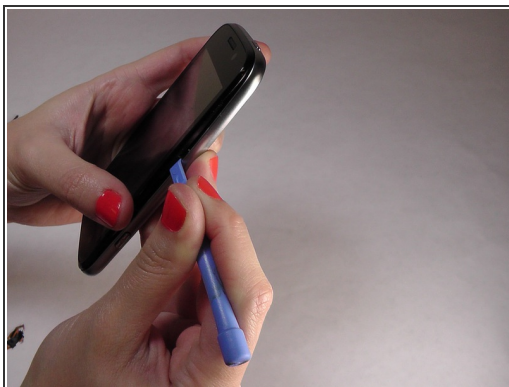

- Wedge the flat end of the spudger between the mid frame and the digitizer.

## Step 6 — Expose the motherboard

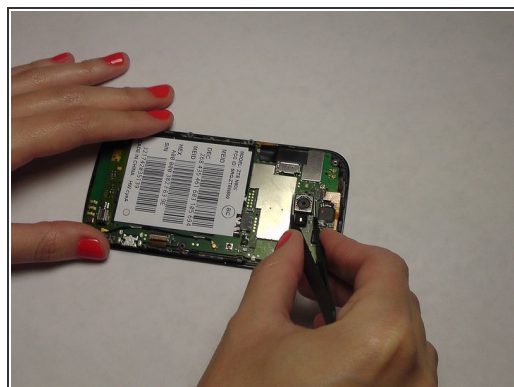

- Gently pry the mid frame away from the rest of the phone to expose the motherboard.

## Step 7 — Remove the camera



- Use the tweezers to grip the back facing camera. Gently pull until the camera is completely removed from the motherboard.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-10-07 08:05:08 AM.